




■ APRESENTAÇÃO



■ DIMENSÕES (mm)

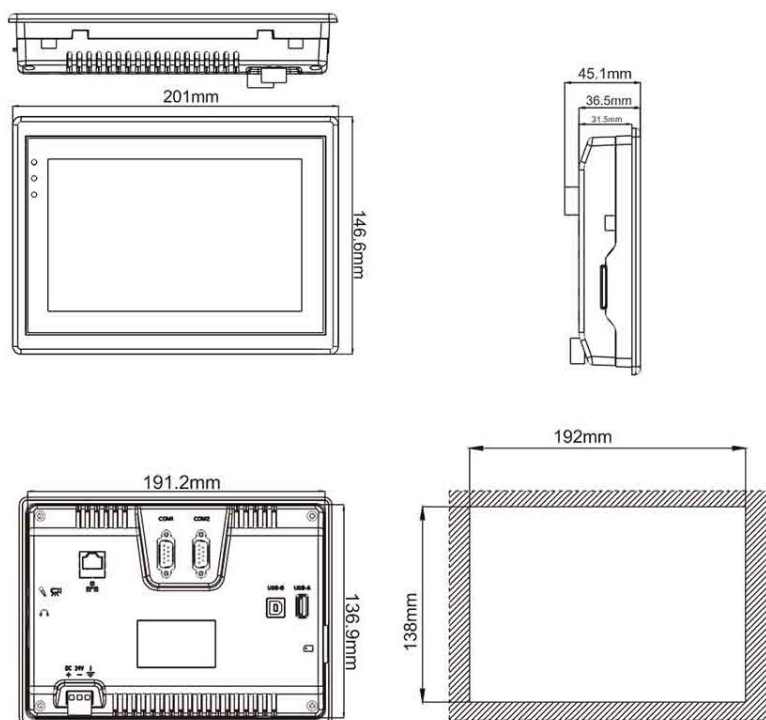

ESPECIFICAÇÕES				
Touch Screen		High precision four-wire resistive		
CPU		Cortex A8 600MHz		
Display	Screen Size	7 Inch	10.2 Inch	
	Resolution	800*480		
	Brightness	300cd/m ²		
	Contract	500:01:00		
	Backlight	LED		
	Backlight Life	50,000 hours		
Storage	Colors	16,000 K Colors	260K Colors	
	FLASH	128MB		
	RAM	DDRIII 128MB		
I/O ports	SD Card	Compatible		
	USB Host	USB2.0x1		
	USB Client	USB2.0x1		
	Serial Port	COM1	RS23/RS422/RS485	
		COM2	RS232/RS485	
		COM3	--	
	Ethernet	YES		
	CAN	N/A		
	HDMI ports	N/A		
	Permanent Calendar		Built-in	
Power Supply	Power Input	24V DC(12~28V DC)		
	Power consumption	10w		
	Power Isolation	N/A		
Dimension	Enclosure	ABS		
	Dimension (mm)	201.0W	272.0W	
		*146.6H	*190.5H	
		*36.5D	*41.4D	
	Mounting Size (mm)	192.0W	260.0W	
	*138.0H	*179.0H		
Weight (KG)	0.6	1.2		
Operation Environment	Protection	IP65(Front panel)		
	Storage Environment	Storage : -30 ~ 70 ; Working : -10 ~ 60 ?		
	Working Environment	10~90% RH ?(Non-? condensing)		
	Seismic Resistance	10~25 Hz (X、Y、Z direction 2G/30 minutes)		
CE Certification		CE marked		
FCC Certification		FCC Class A		
Software		PI Studio		
Remote Control		N/A		